
# plakard®

Fiber-cement\_weatherboard\_sidings\_solutions




ಈ : 12450 g Bar code : 3476060008992

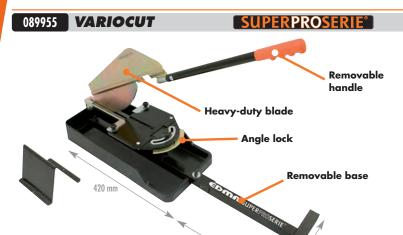

590 mm





- No breathable dust.
- ■No noise.
- Cuts up to 320 mm (straight cut) and 210 mm (angle cut).
- I trestle.




- **Cuts synthetic** weatherboard sidings
- Neat and effortless cut.
- Special siding (cuts in length).
- No sharpening required ever on blade.
- Angle cut 0° to 90°.

## **STRATICUT®**

## **SUPERPROSERIE®**





- No sharpening required ever on blade.
- No breathable dust.
- ■No noise.
- Cuts up to 210 mm length and II mm thick.






- Also includes:
- I trestle.
- I waste collector.



680 mm





- Neat cut without distortion.
- For fiber-cement weatherboard / siding up to 8 mm thick.
- Fine, precise and curved cuts are possible.
- Blade anti-slip profile.



#ು: 728 g Bar code : 3476060003850

ು: 26 g Bar code : 3476060013859



Replaceable blade for Crococut (038555)









# plakard®

## Eiber-cement\_weatherboard\_sidings\_solutions



## 039755 FIBRO SHEAR

### **Drill attachment for larger** cordless or corded drill

- Quick and easy cut.
- Neat cut.
- No breathable dust.
- Cuts up to max. 8 mm fiber-cement and 7 mm natural and man made slate.
- Single handed operation.
- For all 14.4 V and 2 amps drill.



: 1530 g Bar code : 3476060003973

Natural slate



Fiber-cement weatherboard

139755

Bar code : 3476060013972

Replaceable blade for Fibro Shear (039755)



### 039855 **BARDO FIX**

: 1495 g Bar code : 3476060003980



## Set of 2 cladding supports

- For fitting overlap cladding (fiber cement fiber wood or wood) by I person alone.
- Holding of blades in position before nailing with overlap of 30mm.
- For all cladding from 8mm to 16mm thick.
- Adjustable for different widths of clinker from 180mm to 225mm Examples of fiber-cement width:
- 180 mm kind of Hardie Plank
- 190 mm kind of Cedral
- 210 mm kind of Duracolor or Hardie Linea,
- 225 mm kind of Ced'R-Tex





